# ZENDUONE

# Zenbeacon

# Smart Tracking, Instant Insights.

ZenBEACONS provide seamless asset tracking and real-time monitoring using Bluetooth Low Energy (BLE) technology.





ZENDUONE

MAINTENANCE




WORK MANAGEMENT  $\bigcirc$ 

DASHCAMS

# BENEFITS

## **Real-Time & Historical Measurements**

Monitor your operations in real-time and review historical data for a comprehensive understanding of beacon activity, ensuring accurate tracking and insightful data for better decision-making.

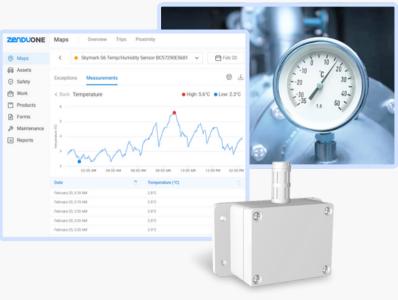


© Maps	Maps Overview	Trips Proximity or BC5729060546	❤ 📛 Feb 21
Assets Safety	Exceptions Measurem		@ L
Work Products	Rule	Address	⊖ Date ⊖
Products	Door Sensor Removed	00D2012A48	Feb 21 10;46 AM
الله Maintenance الله الم	Beacon Test - Door Sensor Removal	0002012A48	Feb 21 10:46 AM
in reports	Beacon Test - Door Open	0002012A48	Feb 21 2:36 PM

### **Rule Triggers & Exceptions**

Leverage custom rule triggers to automate actions based on beacon data, and easily address any exceptions that arise, enhancing operational efficiency and responsiveness.

### **Activity Logs & Location Tracking**

Keep track of beacon activity with detailed logs and precise location tracking, offering visibility into asset movements and connection status—for optimized resource management.

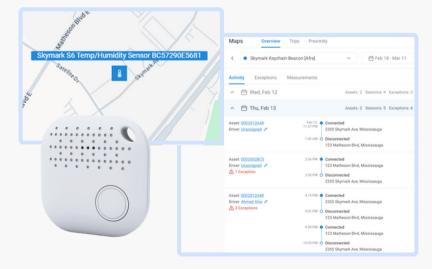





# **BEACON CATALOG**





#### ZenID

#### Keychain Beacon with Trigger Button

- Automatic Driver Identification
- Attendance Tracking
- Passenger Counting
- Accessible Panic Button for Emergencies



ZenClicker

Panic Button Beacon

Warehouse Security

Healthcare Facilities

Driver Safety & Emergency

### ZenDoor

#### Door Sensor

- Vehicle Security
- Cargo Handling
- Tamper Detection
- Environmental Monitoring



#### ZenMini Ultra-Small Beacon Tag

- Tool Tracking
- Equipment Tracking
- Item Tracking

**ZenTemp** 

Humidity Sensor

Waterproof Temperature and

Cold Chain Monitoring

• Warehouse Conditions

Greenhouse Management

HVAC System Monitoring



#### ZenTemp+

Long-Range Temperature and Humidity Sensor

- Cold Chain Monitoring
- Warehouse Conditions
- Greenhouse Management
- HVAC System Monitoring

### PRODUCT SPECIFICATIONS

	ZenID	ZenDoor	ZenClicker	ZenMini	ZenTemp	ZenTemp+
Dimensions	36 x 36 x 5.6 mm	52 x 26 x 14.5 mm (Body) 25 x 12 x 14 mm (Small piece)	50 x 13 mm	37.6 x 24 x 5.3 mm	88 x 58 x 35 mm	94 x 38 x 18 mm
Weight	10 g	18 g	30 g	7g	103 g	42 g
Battery Type	Replaceable 3V 210mAh CR2032 coin battery				3.6V 2600mAh ER14505 Lithium battery	
Battery Life	18 month lifespan				8 year lifespan	
Transmission Range	10-30m indoors, 50-80m outdoors				10-30m indoors, Up to 300m outdoors	30-100m indoors, Up to 900m outdoors
Waterproof Rating	IP44				IP67	IP63
Operating Temperature Range	-20°C to 65°C (-4°F to 149°F)				-40°C to 70°C (-40°F to 158°F)	
Sensor Accuracy	Temp: ±3°C				Temp: ±0.4°C Humidity: ±4%	

